

PRODUCT INFORMATION

RADILON A USX200 100 NAT

DESCRIPTION

PA66 injection moulding grade. Toughened. Natural colour.

Suitable for parts requiring excellent impact resistance and high flexibility.

ISO 1043: PA66-HI

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.15%. Use of a desiccant dryer equipped with a condenser to prevent contamination of the desiccant is suggested. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature
270 - 290°C

Mold Temperature
70 - 90°C

Injection Speed
medium

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet

Underwriters Laboratories Inc. certified material. File number: E116324 www.ul.com

ROHS compliant 2011/65/UE and following amendments

TECHNICAL DATA SHEET

RADILON A USX200 100 NAT

PROPERTY	STANDARD	UNIT	VALUE	DAM*	Cond**
PHYSICAL PROPERTIES					
Density	ISO 1183	kg/m ³	1060		
Moulding shrinkage - Parallel / Normal	290 /70 /60 ^[1]	ISO 294-4	%	1.9 / 1.7	
Water Absorption, immersion at 23°C	2mm	ISO 62	%	6.3	
Moisture Absorption 23°C - 50%RH	2mm	ISO 62	%	1.8	
MECHANICAL PROPERTIES					
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	1700	800
Stress at Yield	50mm/min	ISO 527-2/1A	MPa	45	35
Yield Strain		ISO 527-2/1A	%	12	30
Nominal Strain at Break	50mm/min	ISO 527-2/1A	%	85	0
Flexural Modulus	2mm/min	ISO 178	MPa	1500	600
Flexural Strength	2mm/min	ISO 178	MPa	60	35
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m ²	85	120
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m ²	25	
THERMAL PROPERTIES					
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	260	
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	55	
Heat Deflection Temperature	0.45 MPa	ISO 75/2Bf	°C	150	
Vicat Softening Temperature	50°C/h 50N	ISO 306	°C	170	
FLAMMABILITY PROPERTIES					
Flammability	0.8mm	UL 94	class	HB	
Glow Wire Flammability Index	2mm	IEC 60695-2-1/2	°C	650	
Glow Wire Ignition Temperature	2mm	IEC 60695-2-1/3	°C	675	
Automotive Interior Flammability	3mm	ISO 3795	mm/min	<30	
ELECTRICAL PROPERTIES					
Volume Resistivity	500V	IEC 60093	Ohm*m	1E13	1E11
Surface Resistivity	500V	IEC 60093	Ohm	1E12	1E10
Comparative Tracking Index	Sol.A	IEC 60112	-	600	


*: DAM = Dry As Moulded state according to ISO 16396-2 **: Cond = Conditioned state similar to ISO 1110 1: Melt Temperature [°C] / Mold Temperature [°C] / Cavity Pressure [MPa]

TECHNICAL DATA SHEET


RADILON A USX200 100 NAT

Diagrams


Viscosity-shear rate

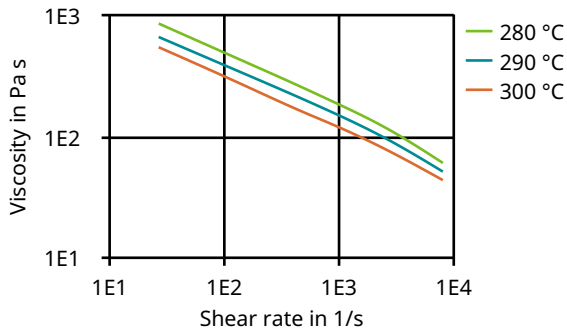

Shearstress-shear rate

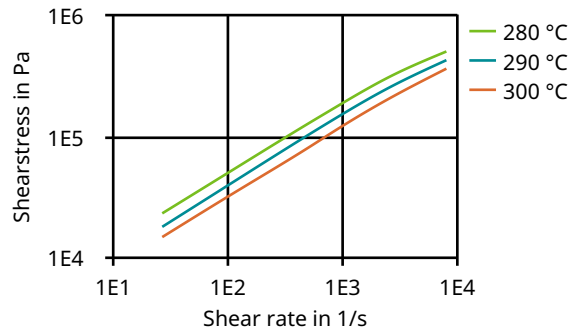

Stress-strain (dry)

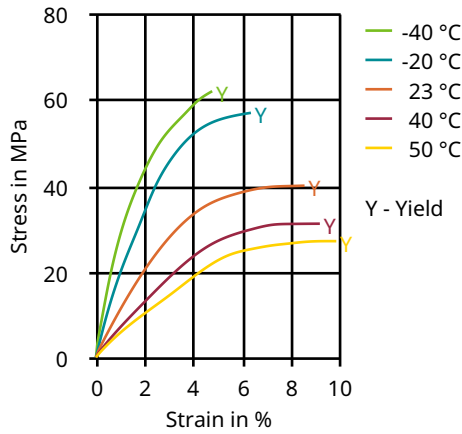

Stress-strain (cond.)

